



CMOVALVES
manufacturing the valve you need



11A SERIES



FABRICATION RANGE *RESILIENT SEAT GATE VALVE*

UTILIZATION:

- Resilient seat gate valve, for depuration and pumping of dirty waters, fire protection facilities, irrigation, industrial pipelines, etc.
- It has minimum head loss, and it is 100% watertight and full bore.

APPLICATION:

Between flanges.

11 - SERIES

RESILIENT SEAT GATE VALVES



GENERAL FEATURES:


- Minimum head loss.
- Full bore.
- 100% watertight.
- Bidirectional flow.
- RF type DIN PN 10/16 flanges.
- Guided gate to ensure the correct sealing.
- WRAS certificate for drinking water.
- Working temperature between -10°C and 90°C.

STANDARDS APPLIED:

- Design according to DIN 3352.
- Hydrostatic tests according to EN 12266-1, class A.
- CE Directive.
- Distance between flanges according to EN 558 series 14.
- Side flanges according to ISO 7005-1.

DIMENSIONES

DN	L	H	H1
40	140	280	320
50	150	317	367
65	170	354	419
80	180	391	471
100	190	450	550
125	200	549	674
150	210	605	755
200	230	756	956
250	250	896	1146
300	270	1031	131
350	290	1169	1519
400	310	1297	1697
450	330	1434	1884
500	350	1564	2064
600	390	1836	2436

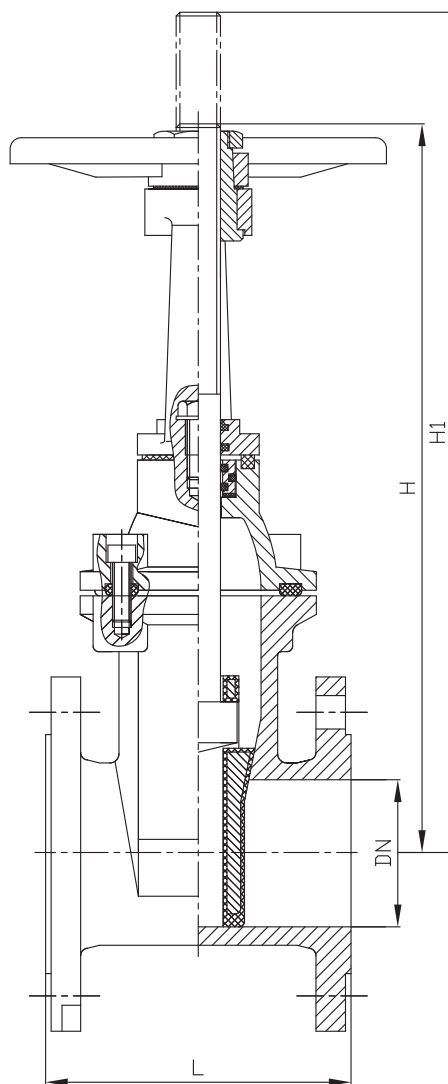

The images and drawings are non contractual.
The specifications of the shown products could vary with previous notice.

11 - SERIES

RESILIENT SEAT GATE VALVES



DESCRIPCION

1	BODY	GJS500
2	WEDGE	GJS500+EPDM/NBR
3	STEM	AISI 420
4	BODY-BONNET GASKET	EPDM
5	O-RING	NBR
6	SEAL RING	BRASS
7	O-RING	NBR
8	BONNET	GJS500
9	DUST RING	NBR
10	WASHER	NYLON
11	YOKE	GJS500
12	STEM NUT	BRASS
13	WASHER	NYLON
14	HAND WHEEL	GJS500
15	LOCKING NUT	BRASS
PAINTING RAL 5015		Epoxy 250 µm

